



## Contents





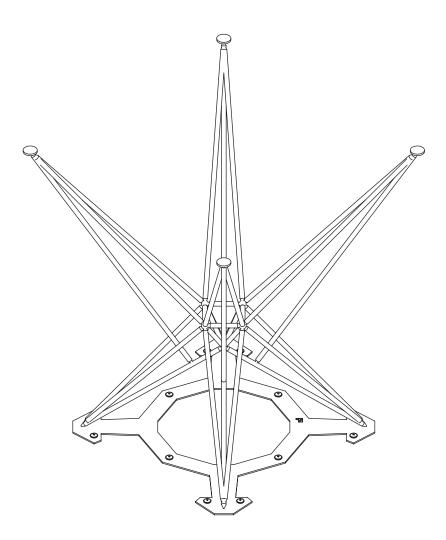


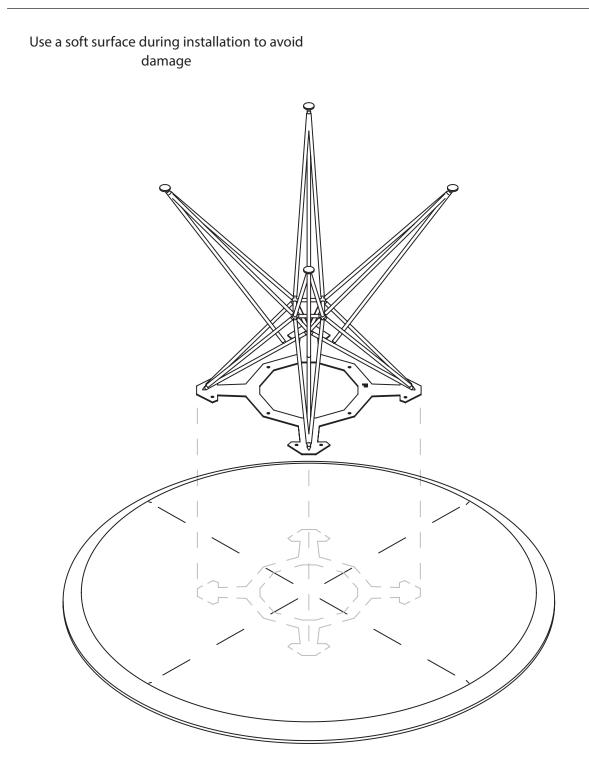

Place the tabletop upside down on a soft surface (e.g. a rug) to prevent scratches.

Draw a center line and the center point on the sheet. Then position the hairpin table frame on it and measure again whether it is exactly in the middle.



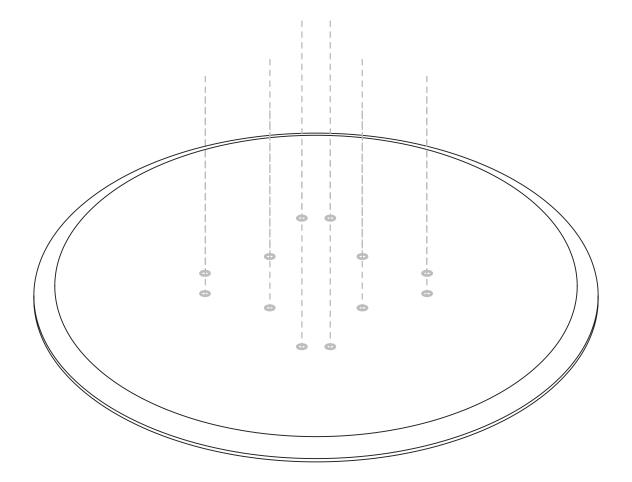


Mark the holes on the table top and remove the hairpin frame from the table top.

Pre-drill the holes at the marked positions with a Ø3mm wood drill bit. Remove the sawdust from the holes.

Add some felt pads to the top of the hairpin frame and to the legs.

## 03| Fix table top



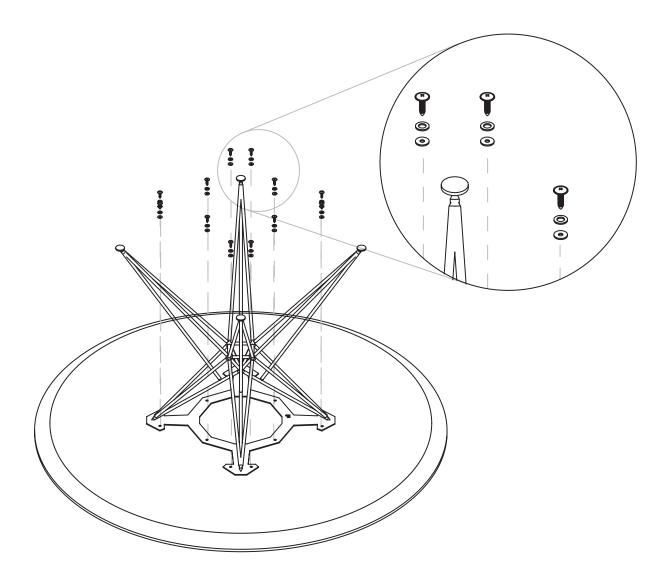

Place the frame with the mounting plate on the table top again and align it with the holes.

When the frame is positioned correctly, it can be fixed with the supplied fasteners.

Tighten the screws well, but never overtighten them. If they are stuck it is enough. If you hear wood creaking while screwing, remove the screw and drill the hole a little further.





Flip the table. Do this with several people to prevent any damage.

The installation is now complete and the table is ready for use.



## Indusigns

van ontwerp tot realisatie